



易美易提(深圳)科技有限公司

EMIETI (Shenzhen) Technology Co., Ltd.



Company Introduction



EMIETI (Shenzhen) Technology Co., Ltd. is a high-tech enterprise integrating research and development with manufacturing capabilities. We specialize in the research and development as well as manufacturing of aroma diffusers, dedicated to providing our clients with higher quality fragrance products. To this end, we continuously innovate in technology and deepen our comprehensive capabilities from R&D to manufacturing across the entire vertical system.

We possess our own R&D center and experienced R&D engineers, and we handle everything from design to manufacturing of core components (precision structural parts, precision metal processing parts, PCBA, assembly, and testing) in-house, in order to shorten lead times and ensure high quality.

Furthermore, we have our own R&D Reliability Test Center, where our R&D team conducts quality assessments in parallel with the design phase of components, ensuring that development lead times are shortened and high quality is maintained from the component level. Our production department is responsible for the entire process, from board assembly to the completion of product assembly, which allows for early feedback on issues and promotes increased production efficiency.

We closely share information with our customers, and our entire staff is committed to enhancing customer satisfaction while adhering to quality, cost, delivery, and safety standards.



Professional



Focus



Trust



Share

Company Location



Shenzhen Office

Company name: EMIETI (Shenzhen) Technology Co., Ltd.

Address: 1608 Building 4, HongLeong technology park, Longfei Avenue, Longgang district, Shenzhen, Guangdong


Established: Jan 2021 **Capital:** \$280,000

Shenzhen Factory

Company name: EMIETI (Shenzhen) Technology Co., Ltd.

Address: 2,3rd Floor, Building 6, Huafeng overseas students Industrial Park, Baolong 1th Road, Baolong sub-district, Longgang District, Shenzhen, China

Established: Jan 2026 **Capital:** \$220,000 **Employees:** 12

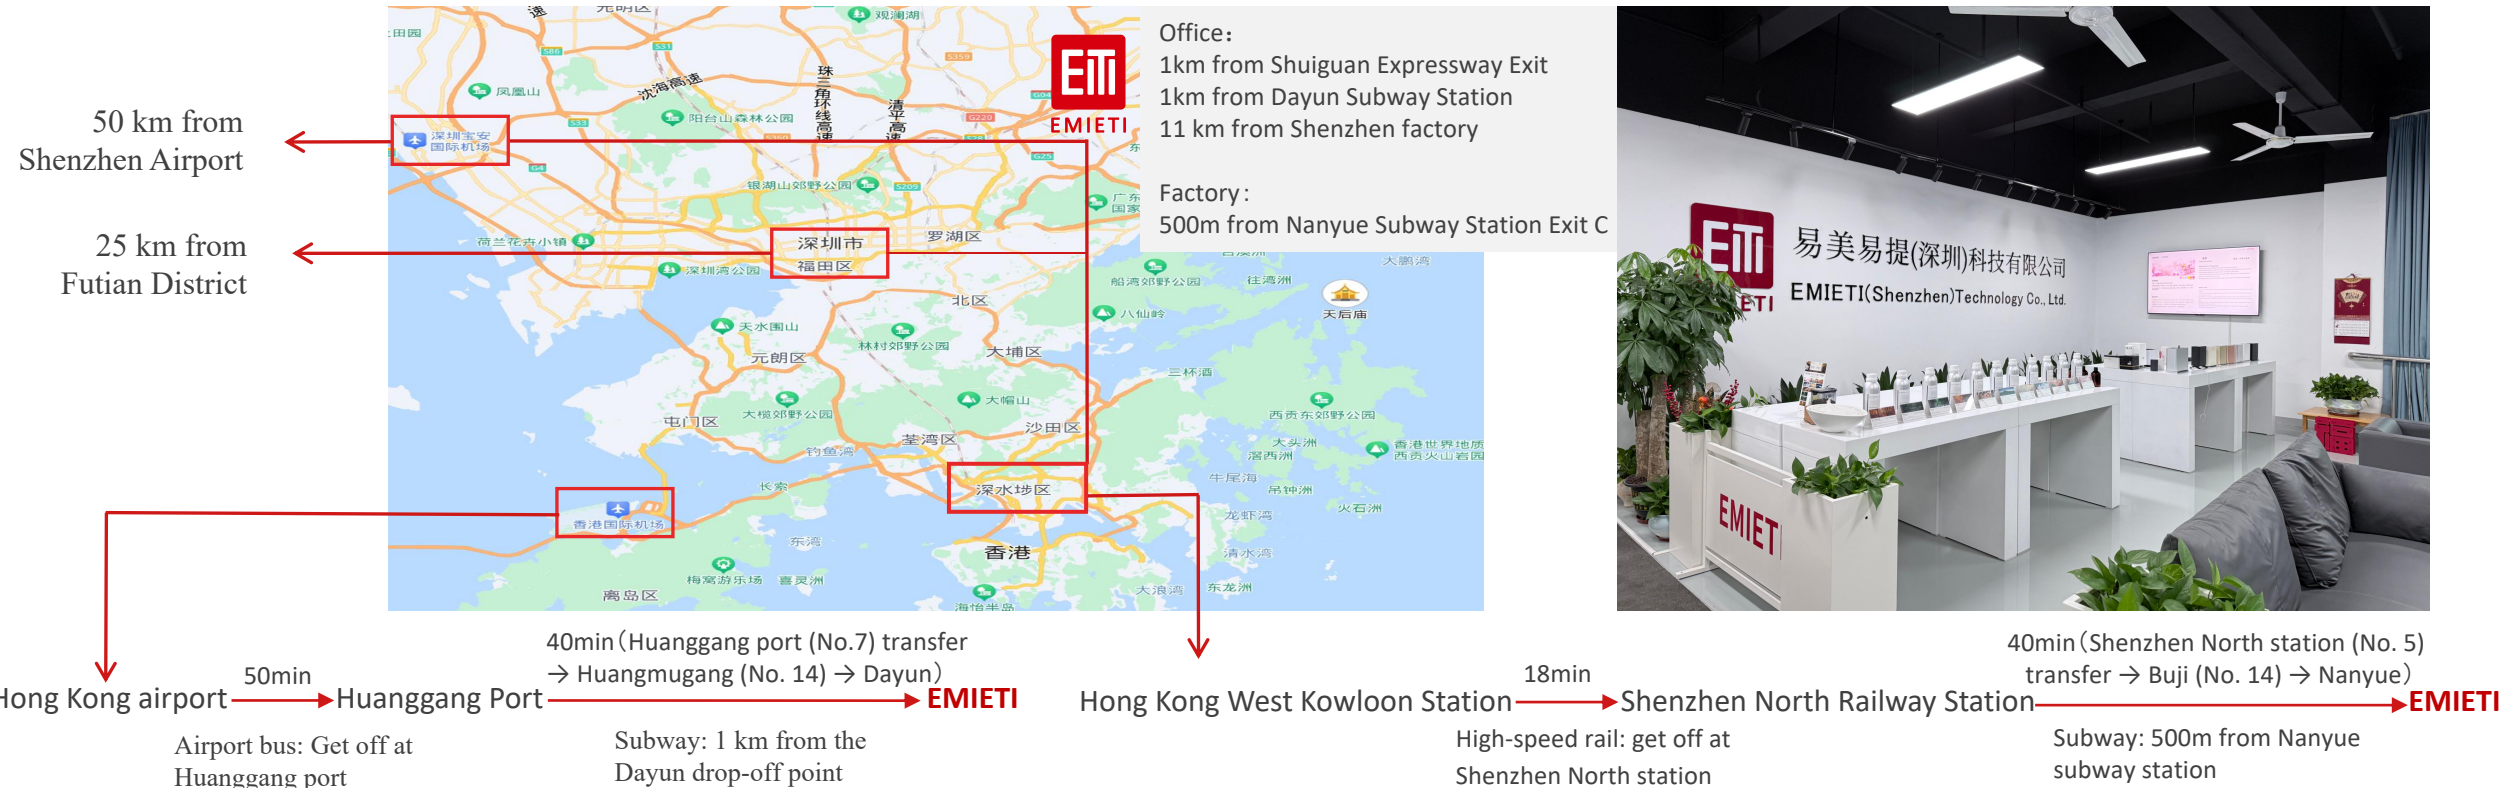

Shenzhen Office



Sales Center & Exhibition Room



Manufacturing Factory



**New Factory Building
(2nd & 3rd Floors)**



Entrance (Showroom)




Meeting Space / Break Room



Sample Production Area



**Incoming & Outgoing
Inspection Area**

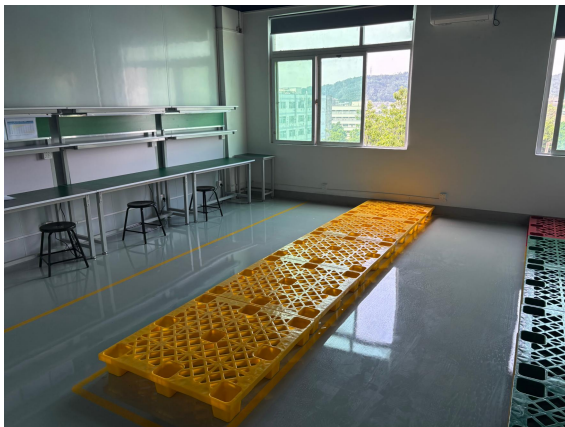

**Manufacturing Process
(High-Mix, Low-Volume System)**



**Environmental Testing Area
(Investment in Preparation)**



**Finished Goods &
Parts Warehouse**



Manufacturing Area: 4,000m²

Bringing the original scent of oil to the space

Essential oils that have been atomized ($2\text{ }\mu\text{m}$ to $5\text{ }\mu\text{m}$, 92%) by innovative nebulizer technology naturally ride on the air flow and diffuse the incense for a long time.

You can enjoy the incense of essential oils.

In addition, we have solved the major problems of aroma diffusers, such as oil leakage and clogging during falls, with our unique technology.



Business Aroma Diffuser

AE-007

<A sense of luxury overflowing with a metal exterior>

>

You can choose a color tone that matches your everyday office or living room




Compact yet delivers wide fragrance diffusion, ideal for large spaces

Compact yet mighty - fills spaces over 200m² effortlessly
Patented misting technology delivers sustained fragrance diffusion
Customizable spray intensity with smart presets

Key Features





- ① 2-5µm concentrated mist particles for superior diffusion
- ② Universal main unit with interchangeable accessories (desk/floor/wall/ceiling mount options) reducing inventory pressure
- ③ Leak-proof design allows cartridge-only shipping (easy customer replacement)
- ④ Programmable touch panel with customizable settings
- ⑤ Aircraft-grade aluminum with anodized anti-corrosion finish, all-metal accessories for premium durability
- ⑥ Service parts available for malfunctions (especially motor pump)
- ⑦ Smartphone-like intuitive touch control
- ⑧ Clog-free operation with essential oils & perfumes (21,755 component-hours tested)
- ⑨ Sealed atomization chamber prevents contamination & oil degradation

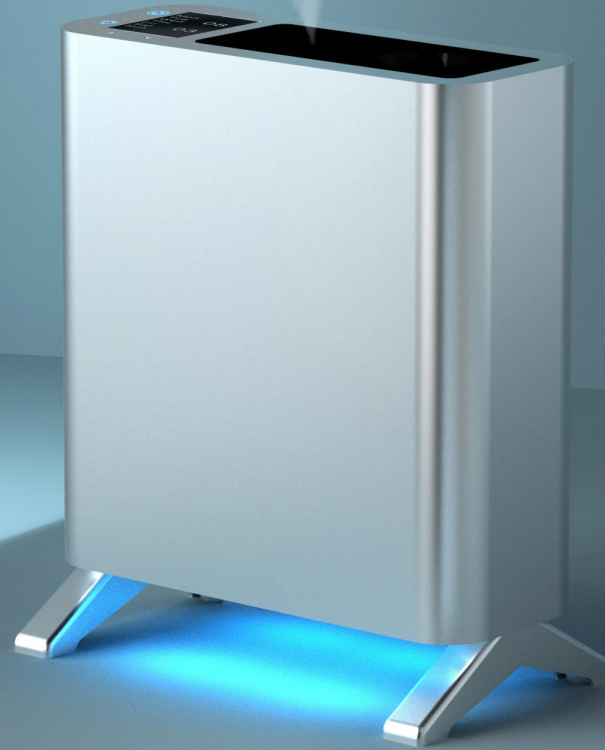


Customizable RGB lighting for personalized ambience

Anti-collision sensors optimized for low-light environments


Seamless integration with power-saving dark mode

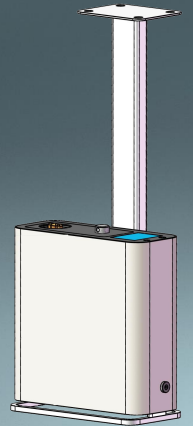






Basic Version

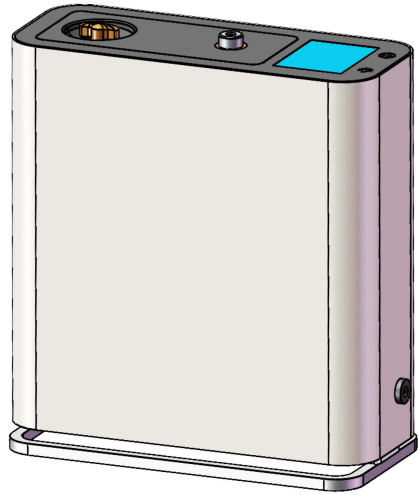


With Base

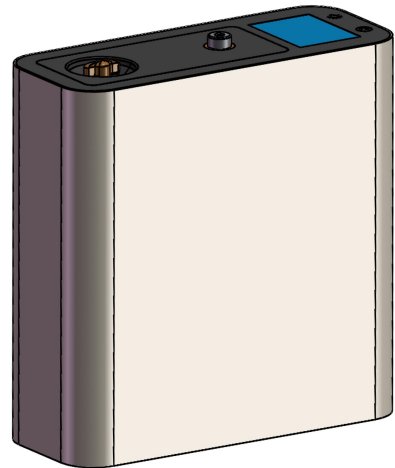







Without Base

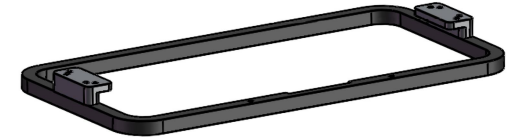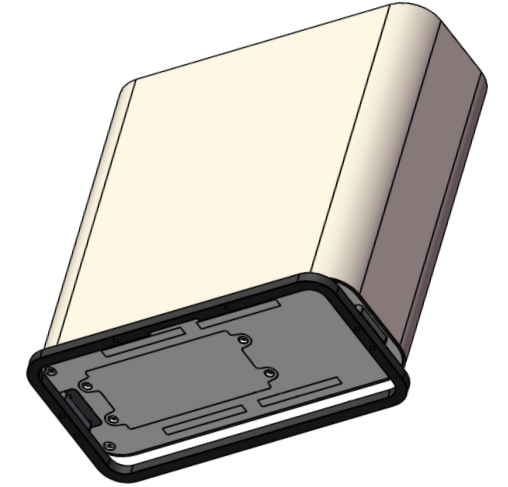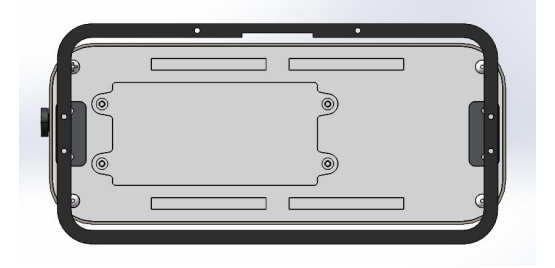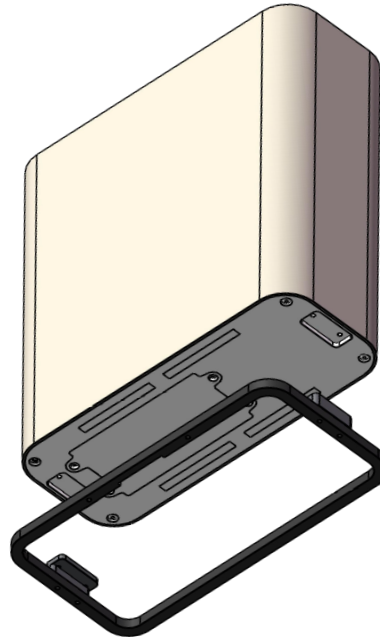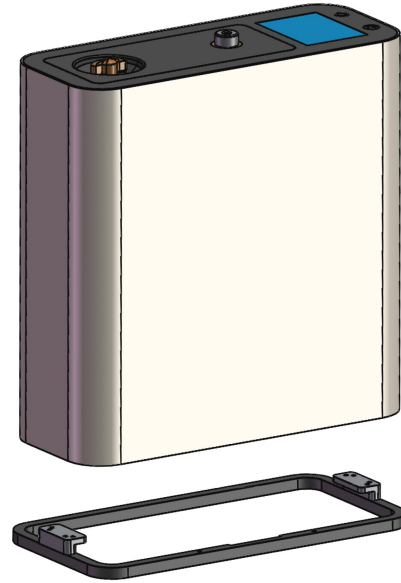


Spray Nozzle
Upward

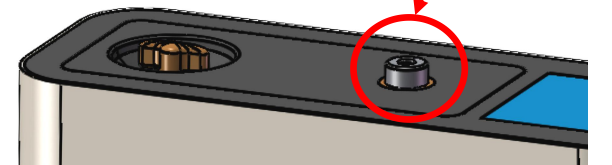






Wall-mounted type

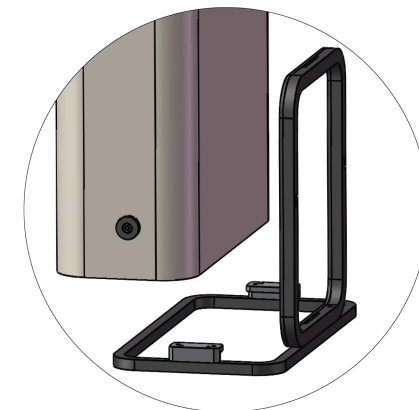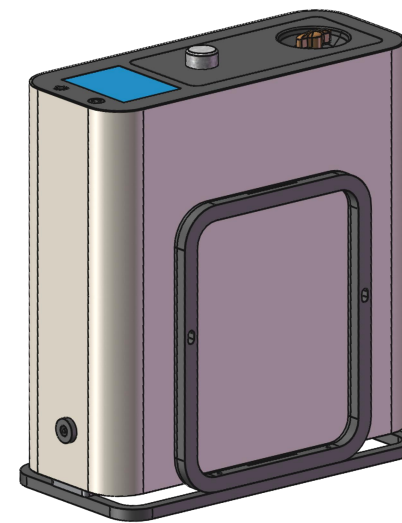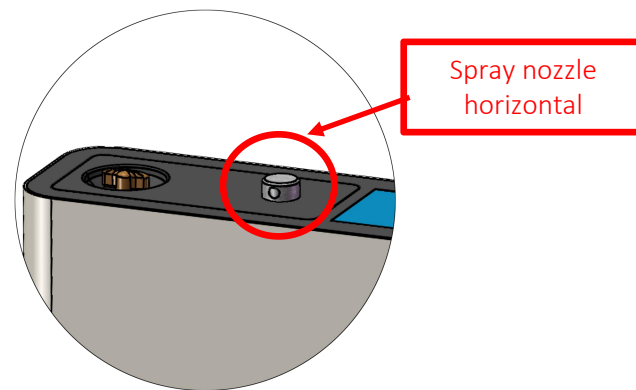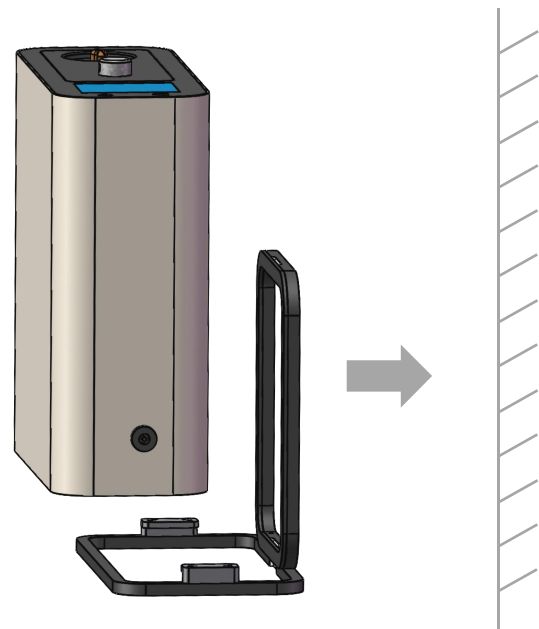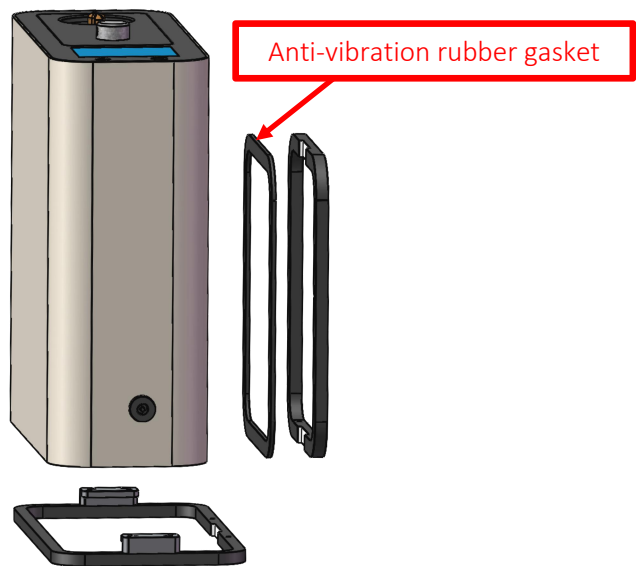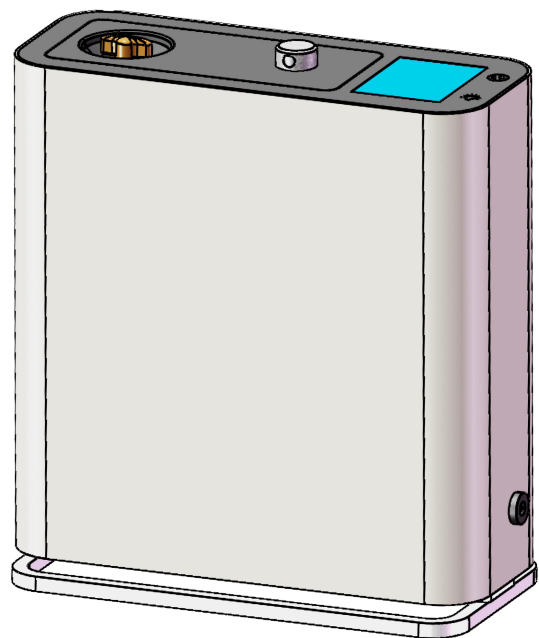



Ceiling-suspended type

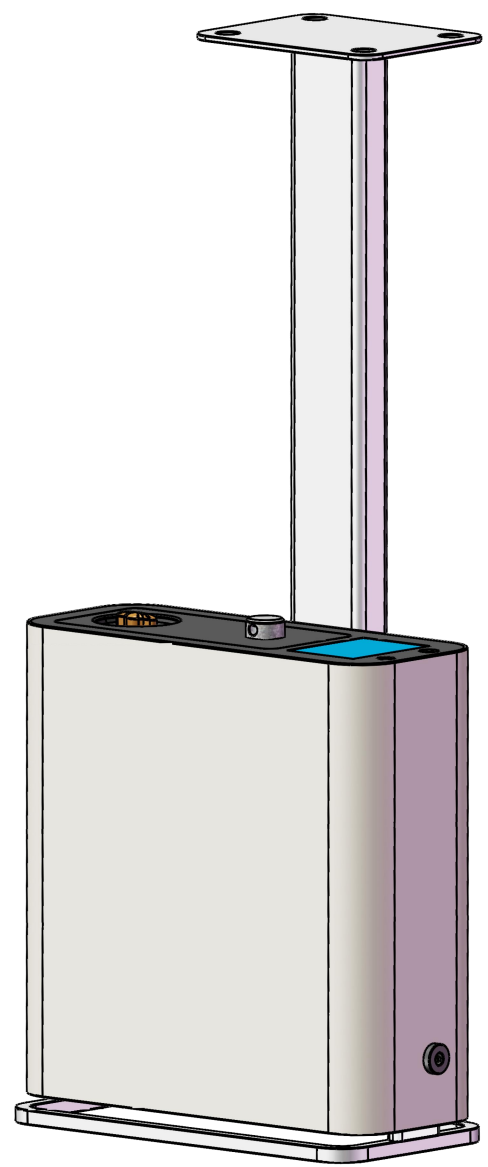




Anti-vibration rubber gasket

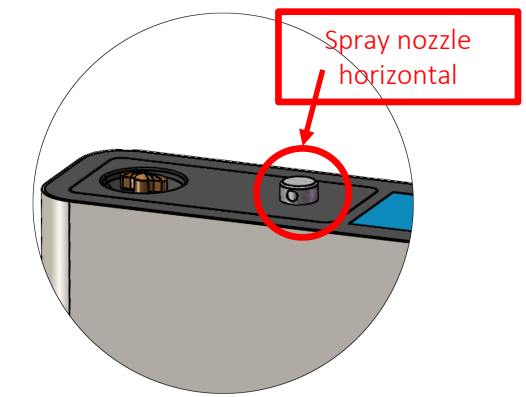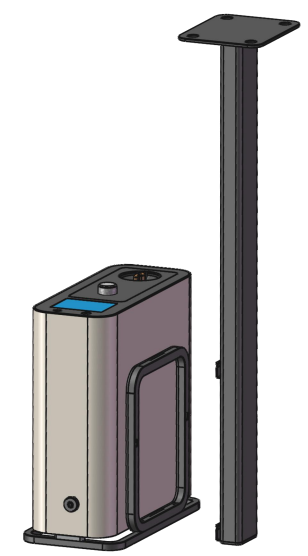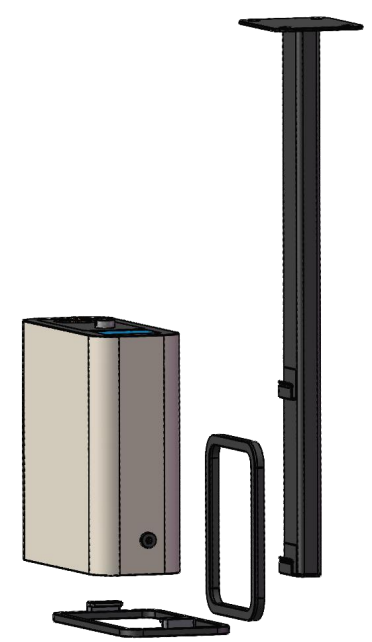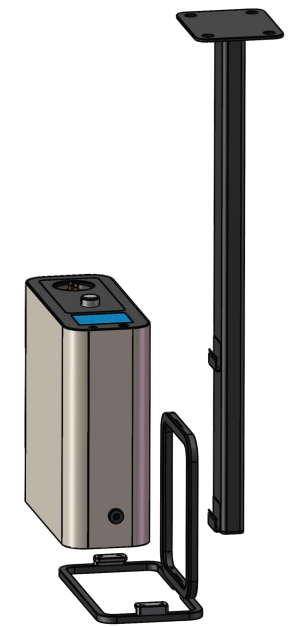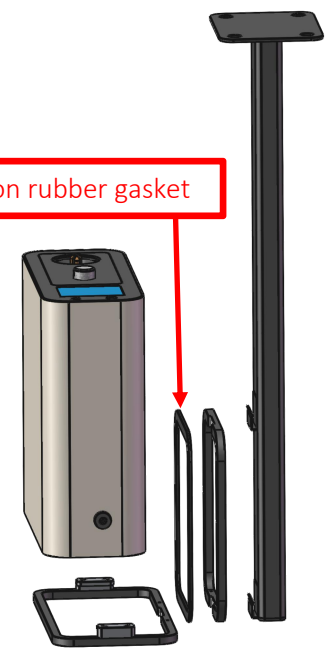

Spray nozzle
horizontal

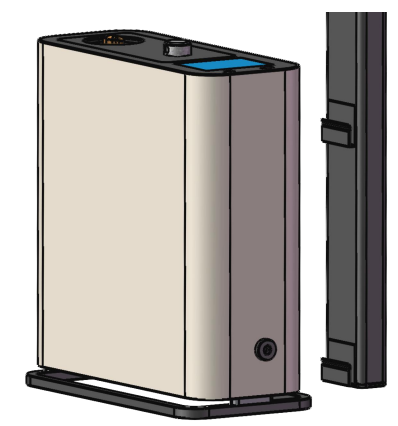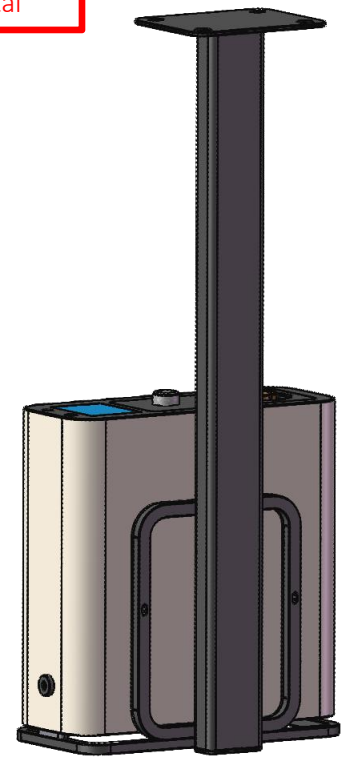


Product Dimensions Unit: mm

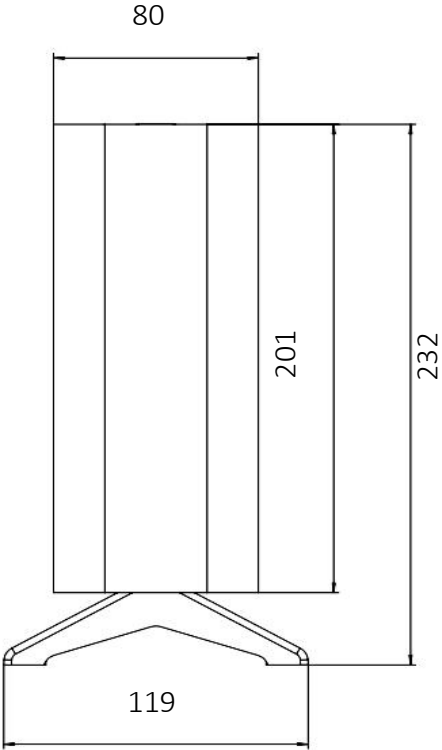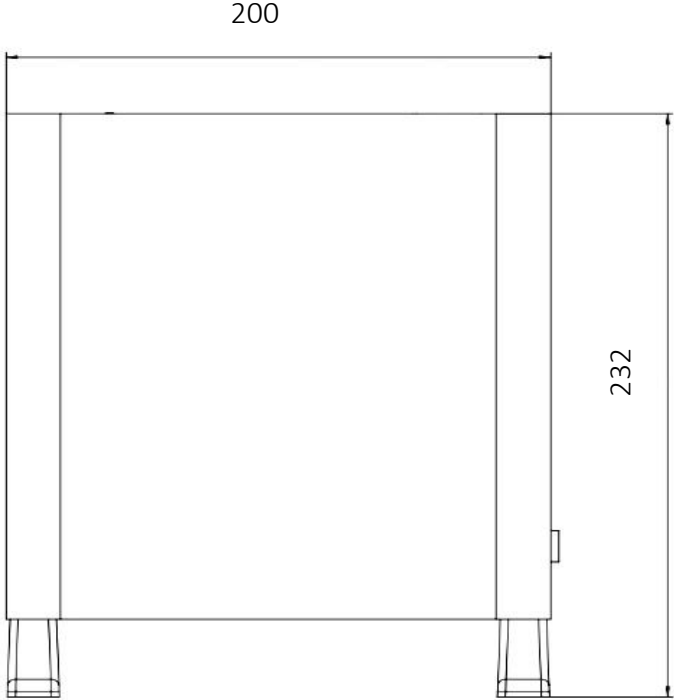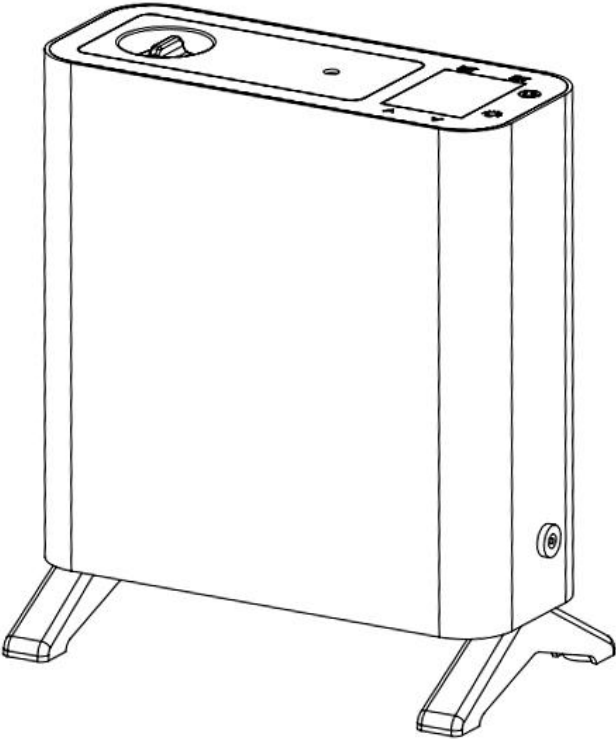

Multi-functional Aroma Diffuser

AE-005

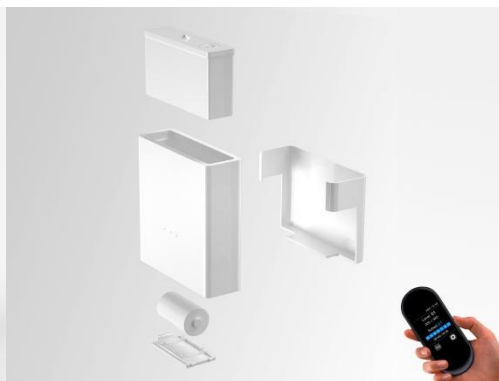

AE-005 Multi-functional Aroma Diffuser

Appearance



Operating the app on a smartphone



iPhone
Android





[Features1]

Two-fluid atomization technology, atomized particles 2-5 μm , excellent diffusion effect

[Features2]

Unique oil bottle design, replaceable oil bottle;

[Features3]

The mist outlet can be rotated to any angle

[Other Features]



- Uses Bluetooth connection, settings and device control via APP;
- Uses a low-noise diaphragm pump to achieve low noise;
- Through radar sensing, realizes device work control;
- Equipped with a liquid level sensor, prompts when the remaining amount is low



[Specifications]

Item	Content	Item	Content
Model	AE-005	Working Temperature	0-40°C
Dimensions	128×128×48mm	Storage Temperature	-20-60°C
Weight	580g	Application Space	30m ²
Material	Plastic	Warranty Period	1 year
Power Supply	DC5V	Environmental Protection	RoHS
Capacity	100ml	Certification	PSE 、 CE 、 FCC
Noise	< 35db		


Appearance

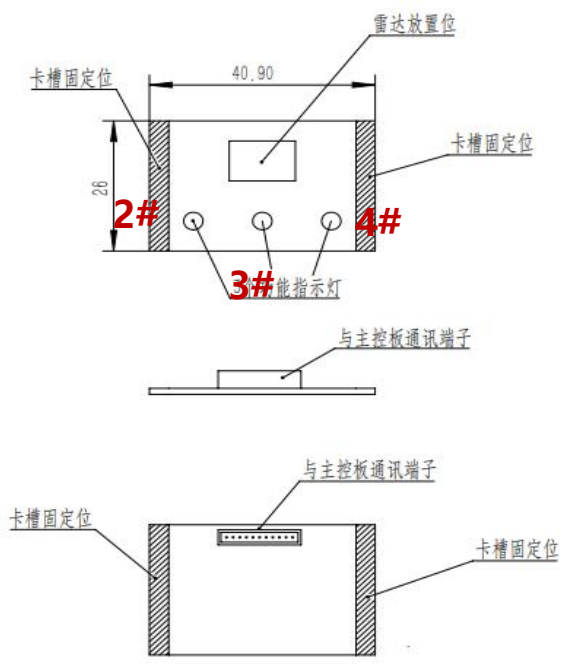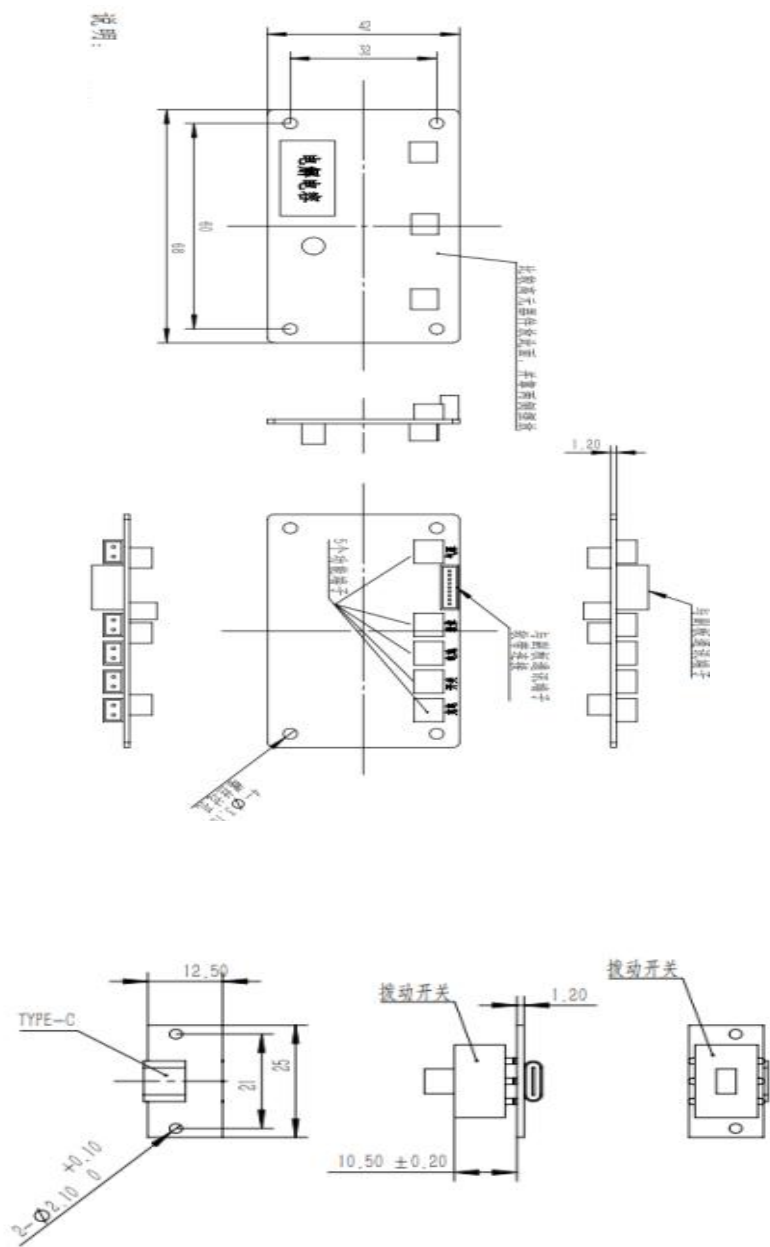



Summary of Specifications


1#	Power Switch	1. Every time the power switch is turned on, it records the mode set previously. 2. When the power switch is off, the battery and Type-C are shut down.
2#	Fragrance/Essential Oil Level Sensor	1. The sensor detects the remaining amount of fragrance/essential oil. The sensor specifications comply with 250/1000ml. 2. When the power is on, if the remaining amount of fragrance/essential oil falls below 5%, the main unit's LED lights up red for 3 seconds every 300 seconds, and the oil bottle in the app displays yellow. (Other indicator lights are off.)
3#	Operating Status Indicator Light	1. When powered by Type-C and operating, the central LED of the main unit stays lit in green. 2. When operating on dry batteries, the green light lights up for 3 seconds every 300 seconds. The remaining battery level of the dry batteries is displayed in the app.
4#	Dry Battery Indicator Light	When operating on dry batteries, when the remaining level reaches 5%, the red light lights up every 600 seconds, and when the dry batteries fall below 5%, the light turns off. When it falls below 1%, the light flashes for 5 seconds and then shuts down.
5#	Type-C Power Connector	Power can be supplied via Type-C. If dry batteries are inserted, power supply from Type-C takes priority.
6#	Power Supply Method	Single dry battery x1, voltage 1.5V, capacity 8000~15000mAh
7#	Air Pump	Brushed 310 air pump, voltage 2.8-3.3V, no-load current $\leq 250\text{mA}$, load current $\leq 550\text{mA}$, flow rate 1.35~1.65 L/min, air pressure $\geq 80\text{ KPa}$, noise $< 45\text{ dB}$
8#	Clock	The RTC time accuracy is industrial grade, and it updates in real-time when connected to the app. Also, the factory default time is the time of the export destination market.
9#	Charging Function	None
10#	Noise	$< 40\text{DB}$
11#	EMC Certification	EN55014/GB4343,PSE,CE,FCC, BT EDR TELEC
12#	Operating Temperature Range	-20°C - 45°C
13#	Spray Operation	1. 5 spray modes: combination of spray mode, start time, end time, and repeat cycle. 2. Set the Work mode in the app; the device and app communicate via Bluetooth. 3. Radar sensor (24G radar, voltage 3.3V): When spraying is active, it detects people and maintains the spray effect. If a person is detected during pause, it sprays for 3 seconds, and if another person is detected within 60 seconds, it does not spray. 4. Factory default spray mode 1 is 8:00-20:00, Work 5 seconds / Pause 300 seconds;
14#	Initial Settings (Factory Default)	Implemented through the app.

Internal structure of the control board


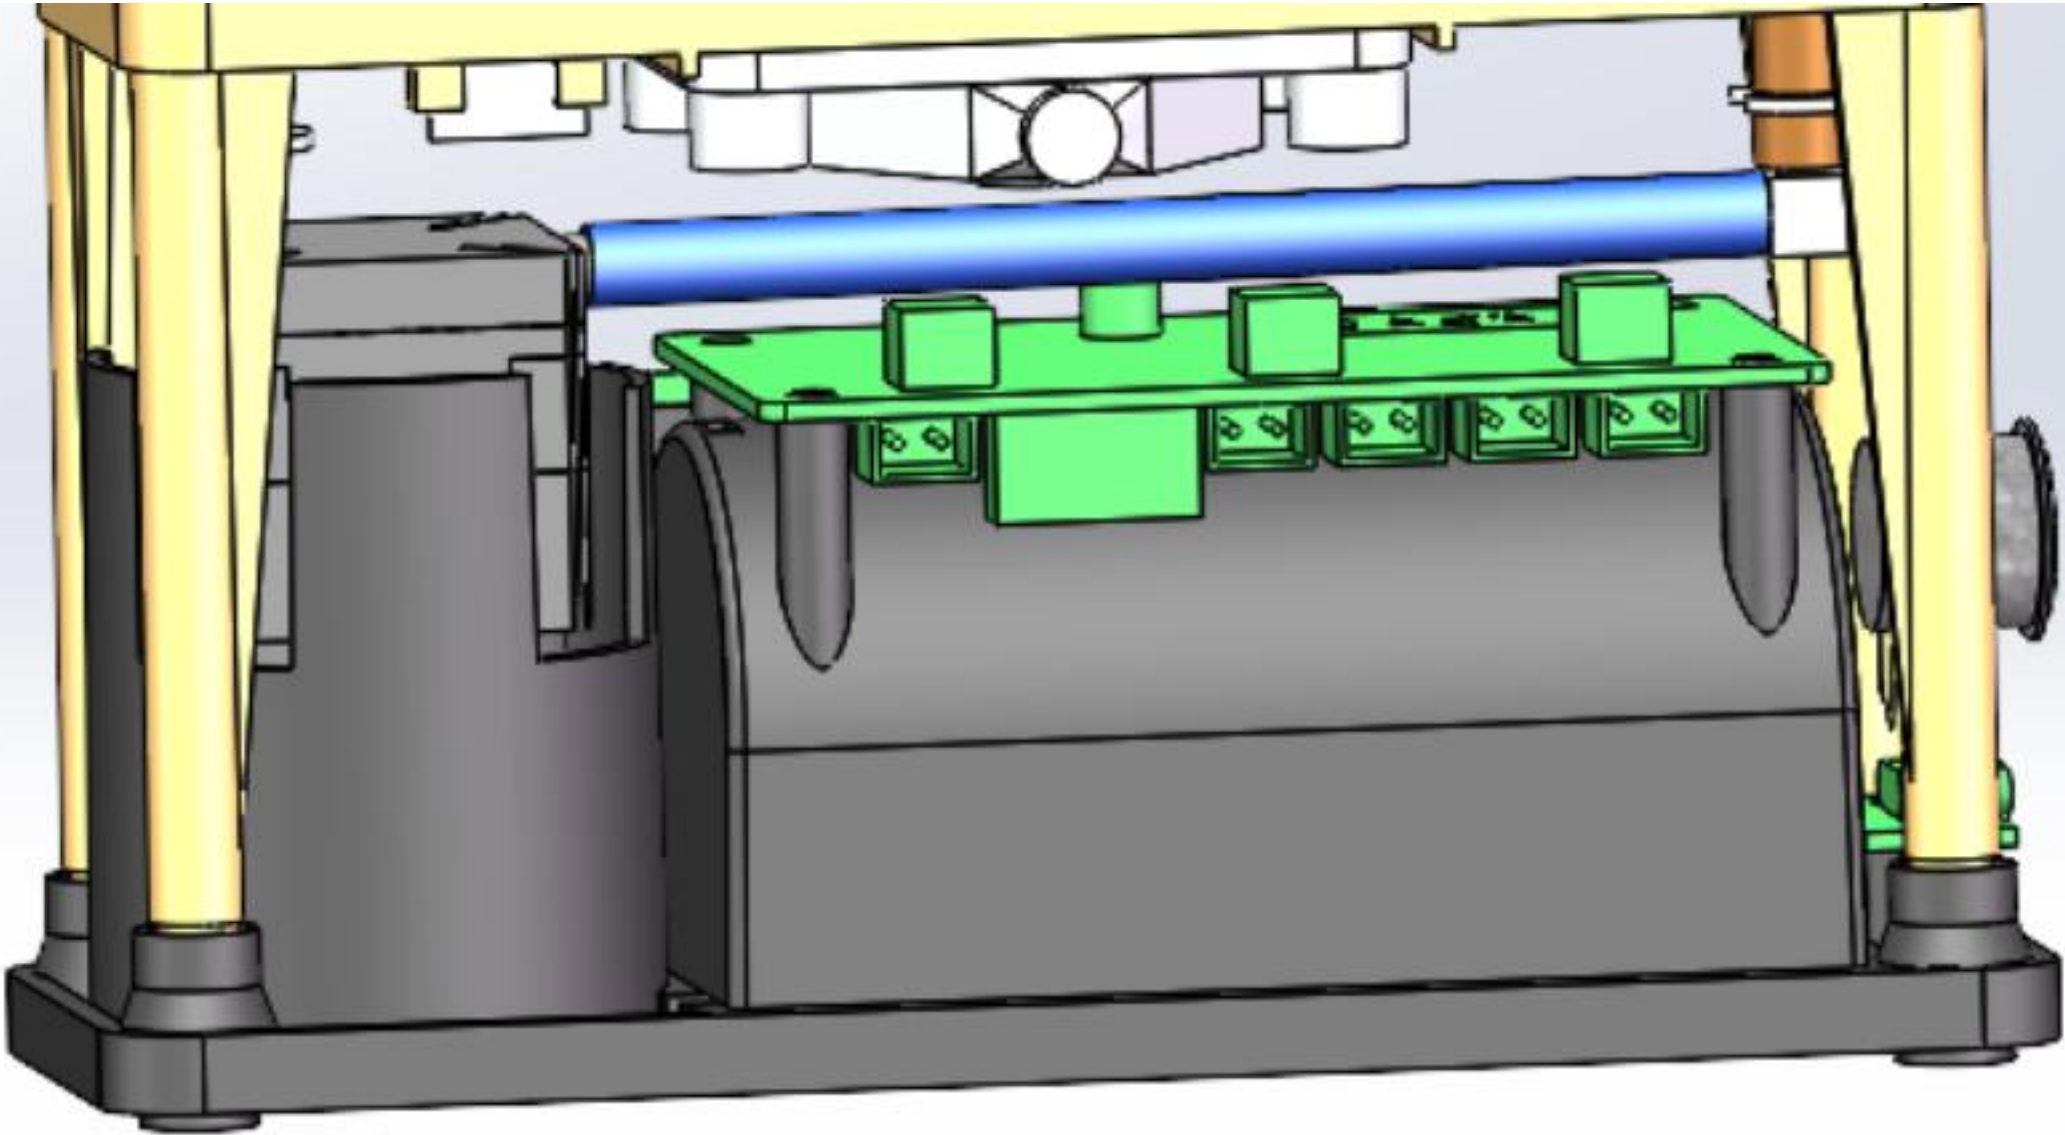


This app is a dedicated one and can be used in conjunction with the 250ml and 1000ml versions.
(There is only a slight difference in the time design compared to LEVEL.)

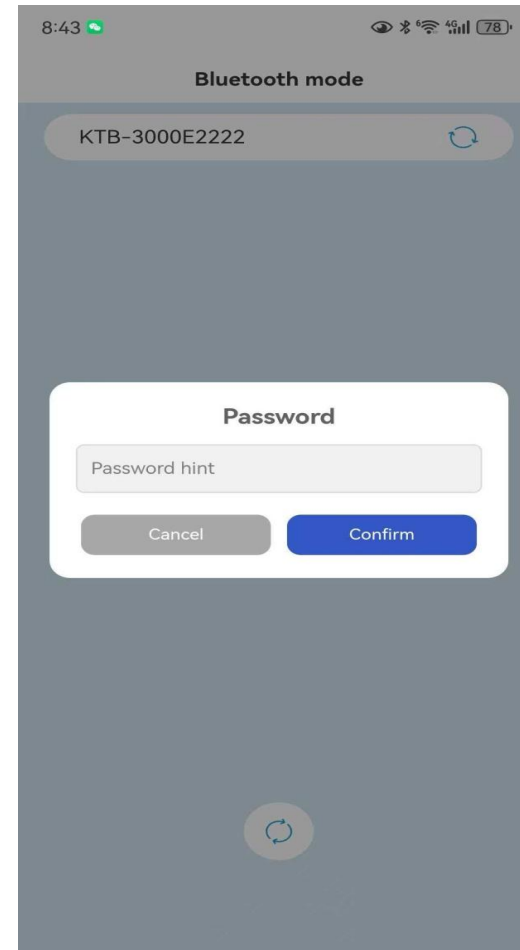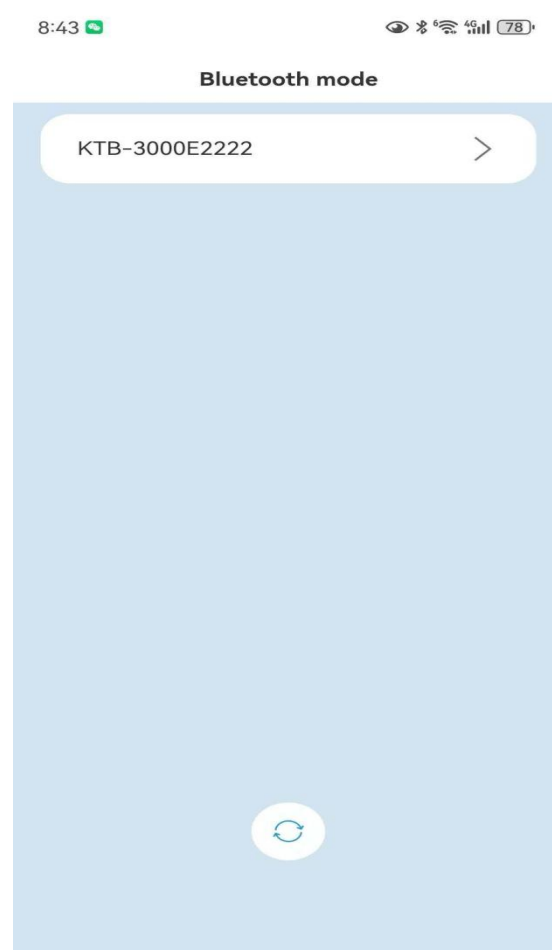

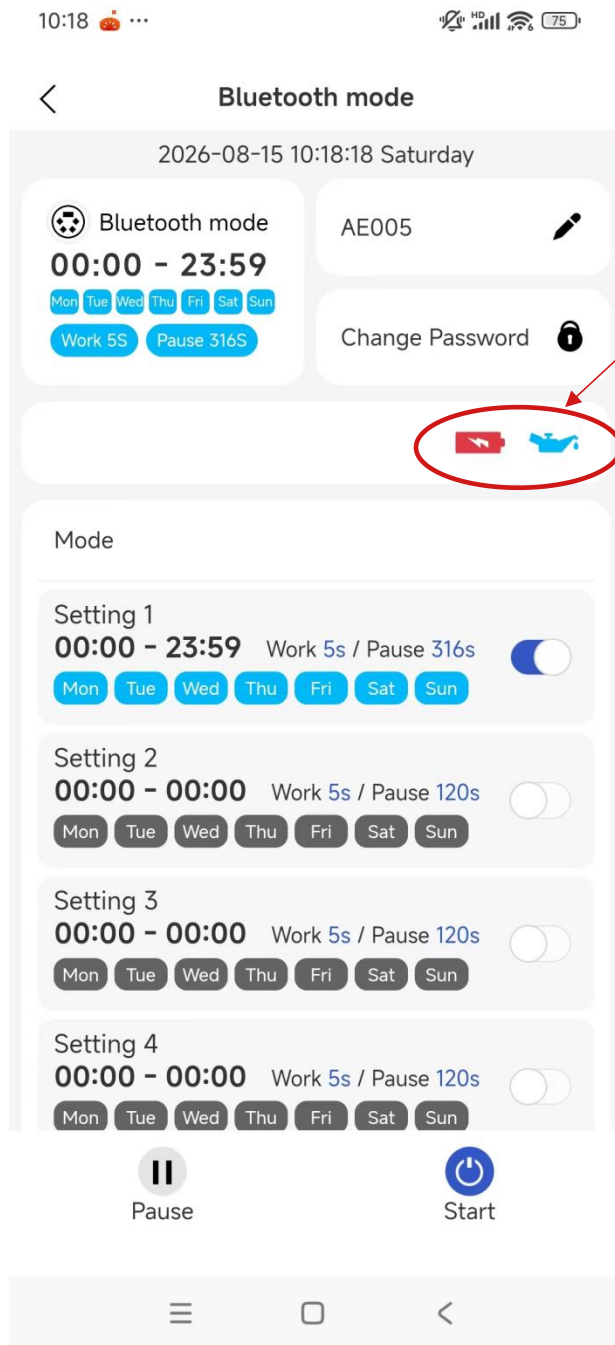

1. Display the remaining amount of fragrance/essential oil on the device:
①A blue icon indicates normal.
②Yellow indicates a low amount.
2. Display the battery remaining status of the device:
①Blue indicates normal dry battery level.
②Red indicates dry battery level is less than 5%.

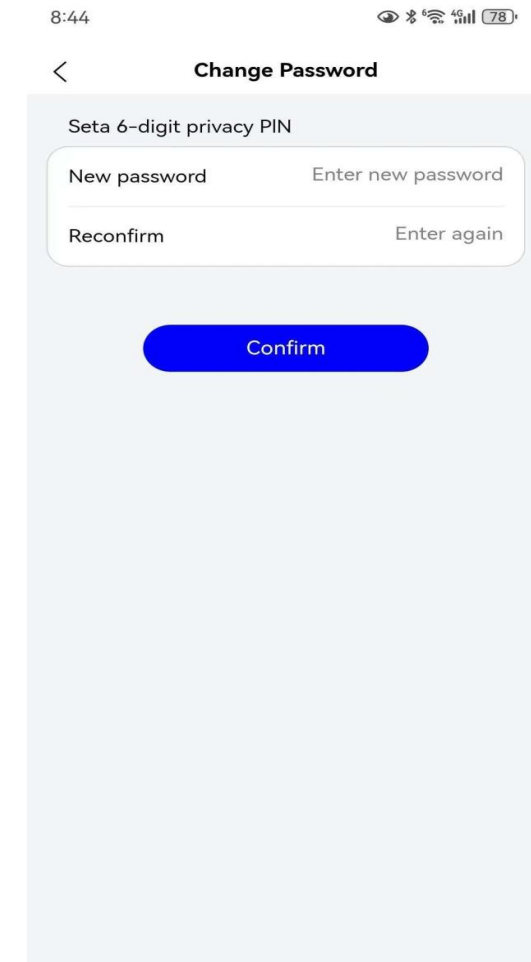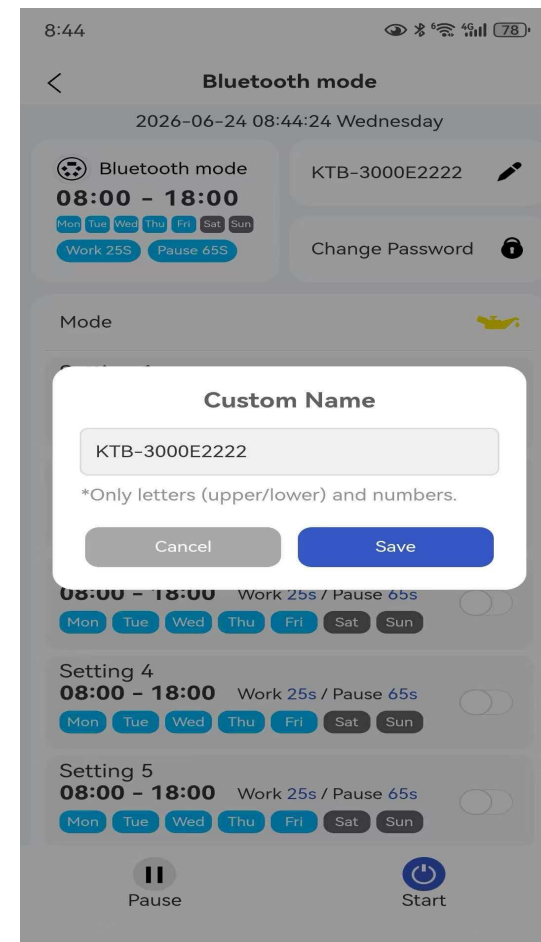

8:44

Bluetooth mode

2024-04-24 08:44:35 Wednesday

Cancel Mode Setting 1 Save

Work cycle

Mon ON Tue ON Wed ON Thu ON Fri ON Sat OFF Sun OFF

Time period

Start Time	End Time
07	17
08 : 00	18 : 00
09 01	19 01

Level

G1	Work 025S / Pause 065S	☒
G2	Work 040S / Pause 045S	☐
G3	Work 070S / Pause 030S	☐
G4	Work 130S / Pause 015S	☐
G5	Work 180S / Pause 010S	☐
Free	Work 003S / Pause 003S	☐

Level	WORK	STOP
G1	5	120
G2	5	240
G3	5	360
G4	5	480
G5	5	600

8:45

Bluetooth mode

2024-04-24 08:45:18 Wednesday

Cancel Mode Setting 1 Save

Mon ON Tue ON Wed ON Thu ON Fri ON Sat OFF Sun OFF

Time period

Start Time	End Time
07	17

Work(second)

3

Pause(second)

3

Cancel Save

G2 Work 040S / Pause 045S ☐

G3 Work 070S / Pause 030S ☐

G4 Work 130S / Pause 015S ☐

G5 Work 180S / Pause 010S ☐

Free Work 003S / Pause 003S ☒

Work time:3-10s

Pause time:60-9999s



易美易提(深圳)科技有限公司
EMIETI(Shenzhen)Technology Co.,Ltd.